

## ■ SPECIFICATIONS

Product Composition	Wireless transmitter ...1 , Receiver ...1 ,Lavalier microphone ...1
Frequency Range	748 - 758 MHz , UHF
Channel Selectable	Up to 16 channels (depending on region)
Tunable Frequencies	25kHz Steps
Pilot tone	32.768kHz
Total Harmonic Distortion	<1% @ 1kHz
Function	IR sync,Channel scan,Battery life information
Accessory	AC adapter...1
	Screw driver...1

### Wireless transmitter






RF Carrier Power	10mW
Audio Frequency Response	50 - 15000 Hz
Audio input Level	-6dBV (maximum), mic gain 0dB
Modulation System	PLL synthesizer
Battery	1 AA size alkaline battery, 1.5 V
Battery Life	Approx. 10 hours
Indicator	Battery status LED , 7 segments LED
Finish	Resin , coating
Dimensions	62(W) x 100(H) x 25(D) mm (with clip)
Weight	approx. 85 g (with battery)

### Wireless receiver



Diversity Reception	AC mains (supplied AC-DC adapter must be used)
Sensitivity	10uV at 45dBA S/N
Squelch(SQ)	Tone SQ,Carrier SQ,Noise SQ
Audio Frequency Response	50 - 15000Hz
Audio Output Level (Maximum)	S4.10-RXA Balanced (XLR socket) : 16dBu Un-balanced (1/4" jack socket) : 10dBu
Power Supply	11-18 VDC 300mA
Dimensions	215(W) x 39(H) x 102(D) mm (excluding antenna and BNC)
Weight	480g

**■ APPEARANCE**

Wireless Transmitter

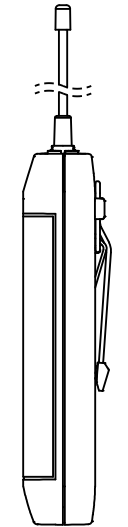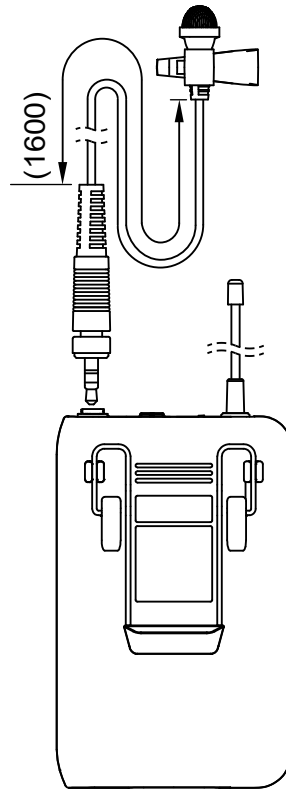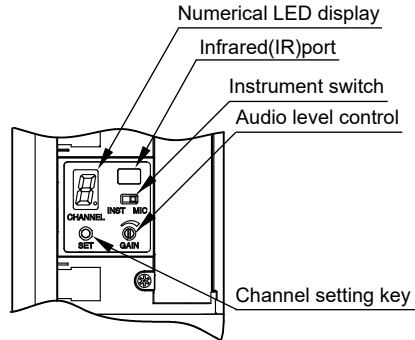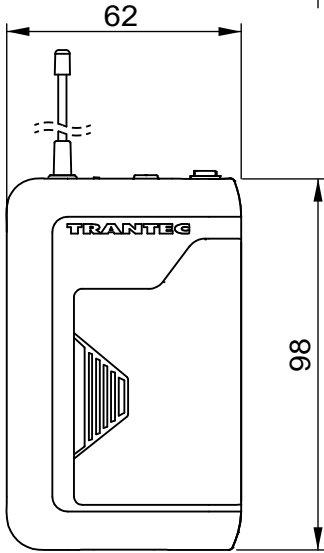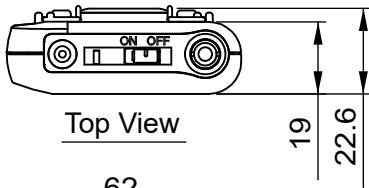

Wireless Tuner

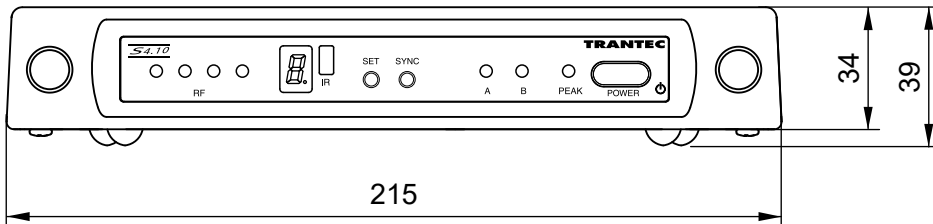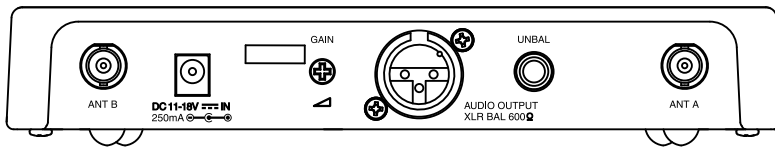

Front View

SideView

