


■ SPECIFICATIONS

Modulation	Frequency modulation
RF Carrier Power	10mW
Modulation System	PLL synthesized
Channel Selectable	10banks, 24frequencies max/bank
Maximum Input Level	120dB SPL (microphone sensitivity: Gain"0")
Audio Input Connector	TA-4 (Mini-XLR 4pins)
Maximum Deviation	±40kHz
Audio Frequency Response	50Hz – 18kHz
Dynamic Range	110dB or more(with S5.5-RX)
Tone Frequency	32.768kHz
Battery	LR6(AA)
Battery Life	approx.8hours
Indicator	LCD display, Power lamp
Antenna	1/4λ mono-pole type
Function	Infra-Red link port, Battery life indicator(4 steps), Microphone sensitivity adjusment(Gain 0-9; 20dB)
Operating Temperature	-10°C to +50°C (14°F to 122°F)
Finish	Aluminum, black, paint
Dimensions	55(W) X 80(H) X 22(D) mm (2.17" X 3.15" X 0.87")
Weight	105g (0.23 lbs.) (with battery)
Accessory	Belt crip...1

■ APPEARANCE

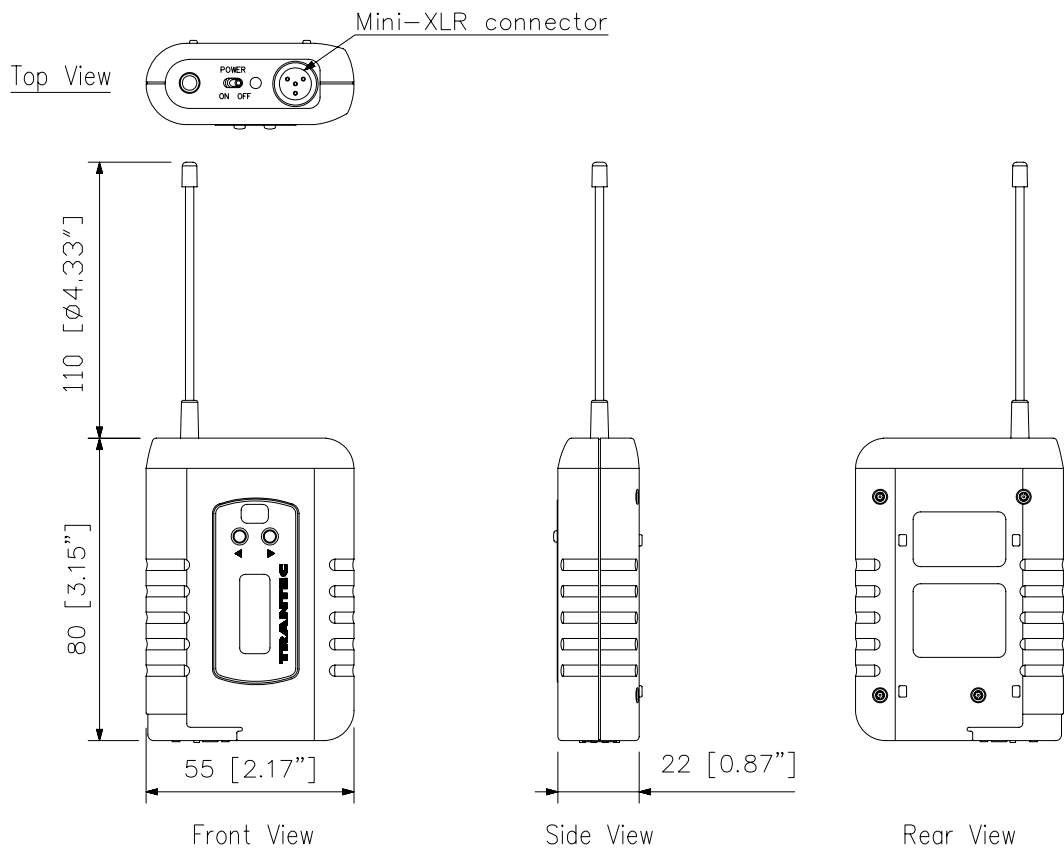

UNIT:mm SCALE:1/2